Pro-Cap Touch Display

No.521T

Pro-Cap Touch

State of the art projected capactive interactive technology offers the most responsive and sensitive touch experience available. Designed for commercial applications, ProCap touch technology works by fixing a sensor grid between a layer of cover glass and the LCD panel, when a finger touches the glass the grid detects the coordinates of the touch point. Unlike other touch technologies ProCap is not affected by bust or debris on the screen surface allos for up to 10 touch points and offers superior optical quality.

Giant Tablet

These displays could be considered the largest commercial tablet on the market; but they are so much more. With a striking aluminium bezel and a sleek and sexy design, these displays always manage to catch the eye. Build with a strong tempered edge to edge glass front and a wide viewing angle, these commercial grade tablets are hard to miss and certainly stand out from the crowd.

10 Point PCAP Touch Technology

Using the most responsive and sensitive commercial touch technology available. Not affected by dust or debris on the screen surface.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Portrait/ Landscape

The screen can be used in either a landscape or portrait orientation depending on your requirement.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 50,000 hours.

Android Media Player | Plug and Play | HDMI Input | 10 points Pro-Cap touch | Integrates Wi-Fi | IPS panel Technology | LED Backlight | 24/7Usage | Landscape or Portrait Orientation

Product Advantages

Achieve compelling customer engagement through touchscreen displays

Build in android interactive software and touch screen offer a complete interactive solution for your demand, demo touch interface demo inside, its very easy to use make professional content.

Product Features

Interactive
10 touch points for the sensitive Pro-Cap touch screen.

Slim Frame
Super slim aluminium frame with powder coated treatment get 26mm only!

Tempered Glass Protection
High light transmittance tempered glass in front of the screen as protection, safety your digital signage player in anywhere.
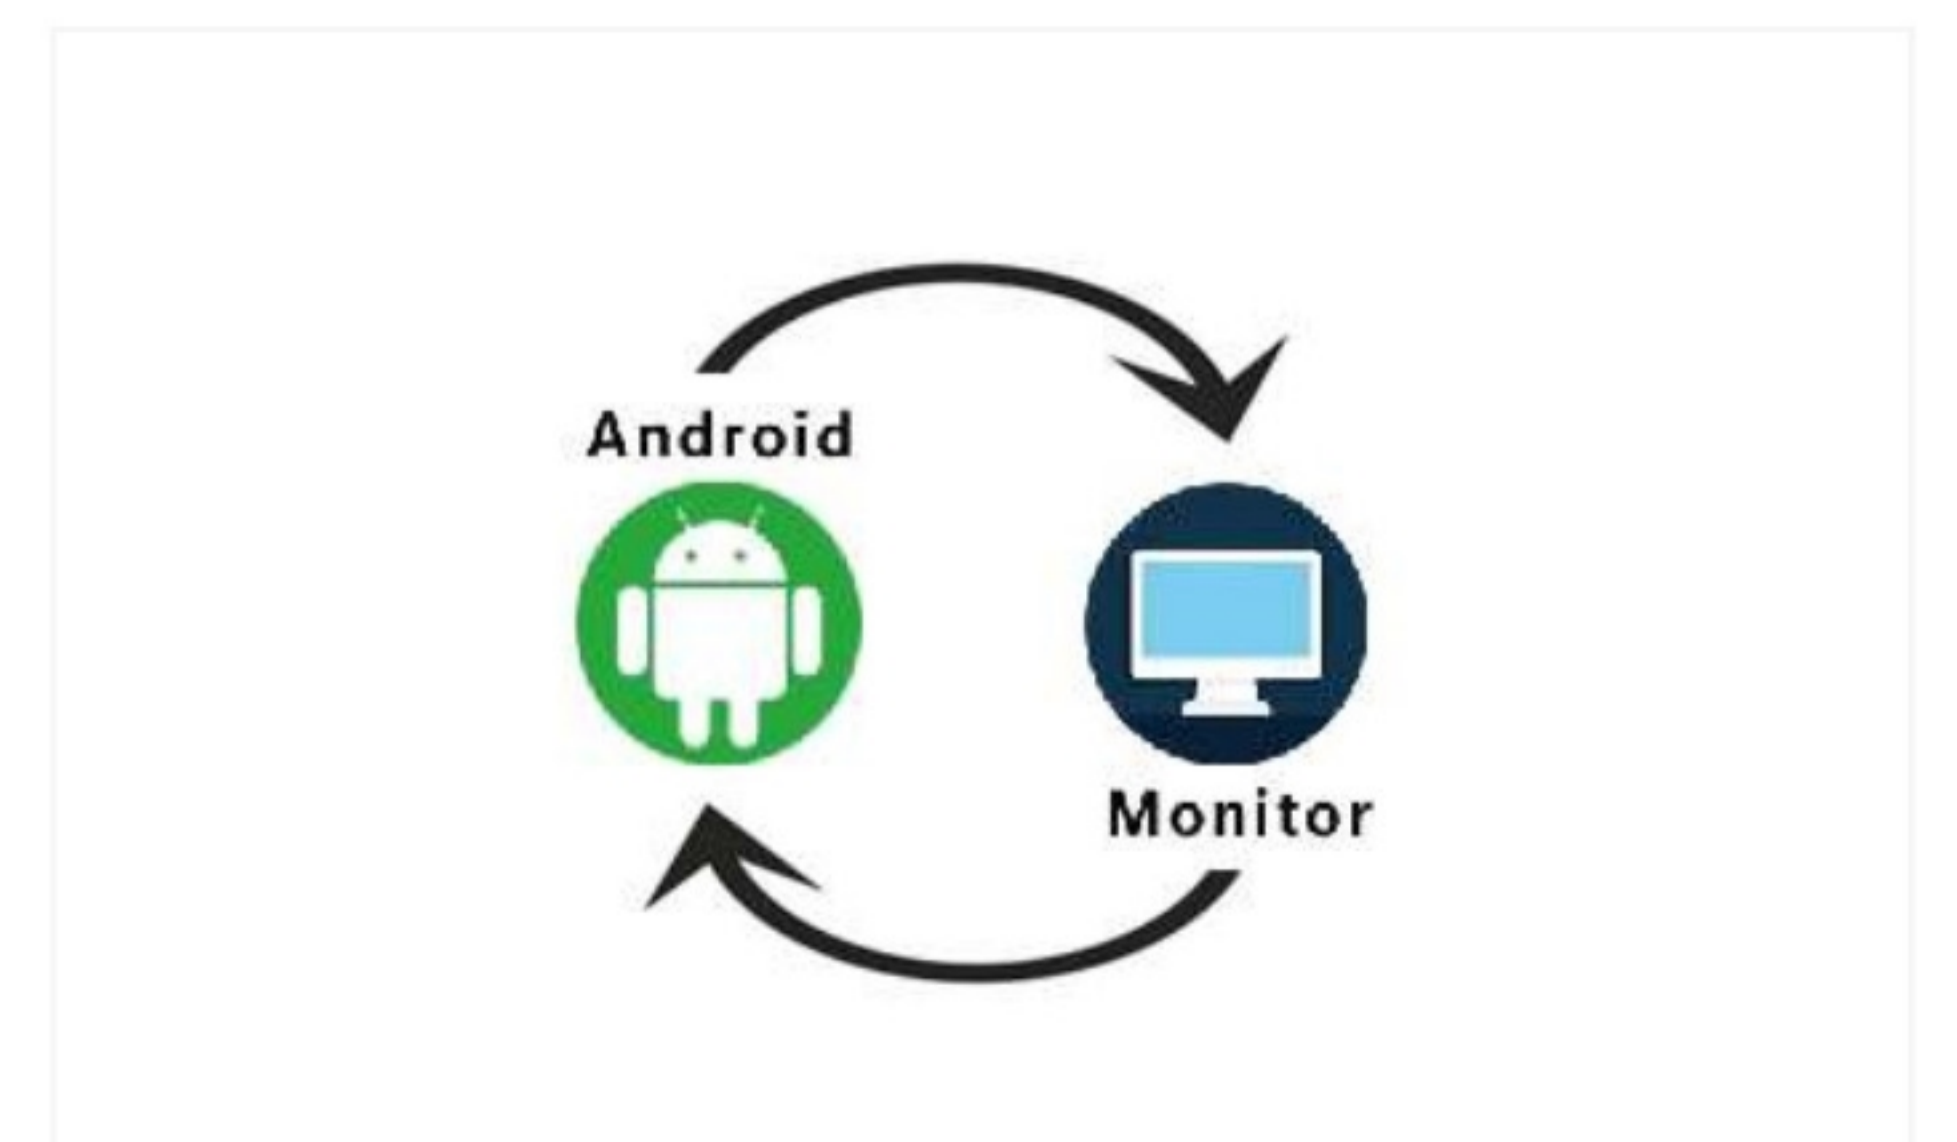

VESA & Free Wall Mount Bracket
You can use your own VESA bracket, if our free wall mount bracket can't meet your demand.

Commercial Grade
Designed for use in commercial aplications this screen can run 24/7. All connectors have been locked to avoid tampering.

Multi Options
You can choose the best one for your client.

Specifications

Model	NO.521T						
Panel							
Display Size(inch)	15.6"	21.5"	32"	43"	49"	55"	65"
Backlit Type	E-LED	E-LED	E-LED	E-LED	E-LED	E-LED	E-LED
Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
Active Display Area(mm)	344(H)x193.6(V)	476.8(H) x268.3(V)	700.5(H) x394.8(V)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	1428.5(H)x803.5(V)
Aspect Ratio	16:09	16:09	16:09	16:09	16:09	16:09	16:09
Brightness(cd/m2)	250nit	250nit	300nit	300nit	300nit	350nit	350nit
Contrast Ratio(Typ.)	1000:1	1000:1	1000:1	1200:1	1500:1	2000:1	2000:1
Viewing Angle(H/V)	178/178	178/178	178/178	178/178	178/178	178/178	178/178
Color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time(G-to-G)	6ms	6ms	6ms	6ms	6ms	6ms	6ms
Operation Hour	24/7	24/7	24/7	24/7	24/7	24/7	24/7
Sound Audio Output	5W, 8Ω (2 sets),Dual-channel stereo audio output						
Power Type	Internal	Internal	Internal	Internal	Internal	Internal	Internal
Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz						
Power Consumption — Max[W/h]	40	40	55	100	120	150	260
Power Consumption — Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W
Power Consumption — Off mode	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W	less than 0.5W
Mechanical Spec Protection Glass	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Mount Type	Wallmount	Wallmount	Wallmount	Wallmount	Wallmount	Wallmount	Wallmount
Environmental Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	0°C~45°C	0°C~45°C	0°C~45°C	0°C~45°C
Storage Temperature	-10°C ~55°C	-10°C ~55°C	-10°C ~55°C	-10°C ~55°C	-10°C ~55°C	-10°C ~55°C	-10°C ~55°C
Operating Humidity	10~80%	10~80%	10~80%	10~80%	10~80%	10~80%	10~80%
Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	5% ~ 95%	5% ~ 95%	5% ~ 95%	5% ~ 95%

Android Media Player

Processor	RK3288, Quad core
RAM	2G
Memory	Built-in FLASH memory 8G
USB	USB2.0 HOST(X2)
LAN	10M/100M Ethernet(Network version screen only)
External memory	Optional (up to 32G SD card)
Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)
Media Resolution	1920*1080
Wi-Fi	802.11b/g/n Ethernet(Network version screen only)
Operating System	Android 7.1

Certification

Safety	CE ROHS

Accessories

Include	Wall mount bracket,Scheduling software, Remote control, Key, Power cable, WiFi antenna
Quality assurance	1 Year (2-3 years optional)
Type of packaging	Carton box /honeycomb box + wooden case

Screenage

PEOPLE WHO PRODUCE RESULTS. THAT'S US!

FACTORY

EXHIBITION HALL

WAREHOUSE

COMPANY PROFILE

- Company Name: **Shenzhen Screenage Electronics Co., Ltd.**
- Established in **2008**
- Focus area: **Commercial LCD Display Product Development**
- **10-Year** Professional Manufacturer in Shenzhen,China
- Factory Total Area: **3000m2**
- Output: **100,000Pcs/Year**
- Product Range: Digital Signge, LCD Video Wall, Floor Standing Kiosk, Industrial LCD Monitor, All-in-one PC and LCD Interactive Whiteboard.
- Main Market: North America,Western Europe,Mid East,Eastern Europe, South America,Africa
- Certificate: **ISO9001,CE,EMC,RoHS**

Have questions?

We have answers!

Get answers about Pricing,Specifications,Installation,and more

CONTACT US NOW!

E-mail: info@screenage.cn